




TG-100

TG-200

TG-300

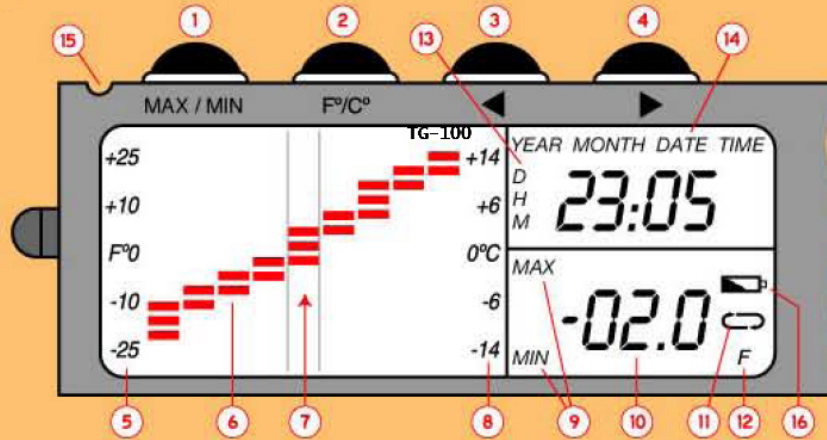

Quick Start Instructions:

- ① Selects MAXIMUM or MINIMUM Temperature to display.
- ② Selects FAHRENHEIT or CENTIGRADE display scale.
- ③ Steps BACK through data. Hold ③, press ④ moves to beginning.
- ④ Steps FORWARD through data. Hold ④, press ③ moves to end.
- ⑤ Left hand scale in RELATIVE DEGREES FAHRENHEIT.
- ⑥ Graphic display of Maximum and Minimum Temperatures.
- ⑦ CURSOR for Temperatures and Times shown at ⑩. Memory capacity in Standby.
- ⑧ Right Hand scale in RELATIVE DEGREES CENTIGRADE.
- ⑨ Indicates Maximum or Minimum Value being displayed at ⑩.
- ⑩ Maximum or Minimum Temperature for day of CURSOR ⑦.
- ⑪ Mode: LOOP Overwrite. Saves LAST 100 days.
 STOP on full. Saves FIRST 100 days.
- ⑫ Fahrenheit or Centigrade units being displayed.
- ⑬ Sampling Period, Day, Hour, Minute.
- ⑭ Year, Month, Day, Time indicator. Used during SET-UP.
- ⑮ RESET PINHOLE: Use paperclip to reset and setup TIME and DATE.
- ⑯ Low battery.

Set-up Procedure

1. Take a straightened PAPER-CLIP and insert into Pinhole ⑮ for 1 second.
2. Use ③ & ④ to select HOUR. Press ①. Use ③ & ④ to select MINUTE. Press ①. Use ③ & ④ to select MONTH. Press ①. Use ③ & ④ to select DAY. Press ①. Use ③ & ④ to select 2 digits of YEAR. Press ①.
3. Use ③ & ④ to progressively select "LOOP" or "STOP" on Full mode for either "D" (Day) mode, "H" (Hour) mode or "M" (Minute) mode. Press ① to Save your selection.

Quick DATA CLEAR: Retains Mode, Time and Date settings.
To ERASE ALL DATA: While holding ① for 3 sec., press ③ & ④ together.

Thaw-Out Alarm

Press ② for 3 secs. When "AL.0" appears at ⑩, toggle to ON ("AL.1") using ④
Toggle back to "AL.0" for OFF. Save setting by pressing ②.

Date Out Of Range: Top or bottom row on chart ⑥ will flash.
Temperature below -5°F (-20°C), **LL** will appear at ⑩
Temperature above 122°F (50°C), **HH** will appear at ⑩

IMPORTANT: LCD screen is best viewed after it is allowed to warm to room temperature.
USE ONLY TOP quality ALKALINE Batteries (2 x AAA).
Inferior batteries are not good at low temperatures.

Detailed instructions available at www.guardianthermometer.com