
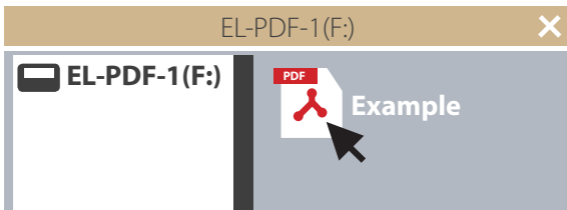





3. When you are ready to view the recorded data on your logger, press and hold the  button to stop the current logging session. Remove the logger from the plastic sleeve and connect it to a USB port.

4. Copy the file off the device as if it were a memory stick.




5. Press the  button to start a new data logging session. To maintain IP67 status, the logger must be placed in  accessory bag, .




Other EasyLog Cold Chain Data Loggers



Temperature
FOOD



Temperature/Humidity
FOOD



Temperature/Humidity
PHARMACEUTICAL



1

02

