


Humidity Warning Light

LIGHT SYSTEM DIRECTIONS

P/N: TIPALM0011

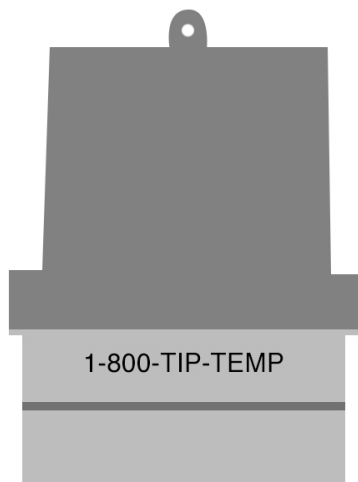

The Humidity Warning Light System is a complete signal system. The light will automatically start flashing when the user selected threshold is reached. Battery-powered to give its warning without need for constant power supply. Uses (2) standard D-Cell Alkaline batteries (INCLUDED). So stop crossing your fingers, hoping your sensitive environment is within appropriate moisture levels.

Humidity Warning Light Turns ON when High or Low Threshold is met.

- Humidity Alert easily mounts to most surfaces

We strongly recommend Alkaline batteries because of their longer service life and relative resistance to low temperature conditions.

Here's why the unique Humidity Warning Light has been preferred for many years:

- A complete signal system. Nothing more to add.
- Battery-powered to give its warning even when electrical power is off or the telephone cannot be used. Uses standard D-Cell Alkaline batteries which are available wherever batteries are sold.
- Clear powerful flashers alert employees, friends, neighbors or caretaker to possible danger.
- Simple to understand, test and use.
- Reliable, low-cost protection against the worry of your sensitive environment experiencing too high or low moisture conditions.

Preparing Signal for Use:

- 1) Unscrew the bottom cover of signal and insert two 1.5 volt "D" size Alkaline batteries in direction indicated in case. Replace cover (light should flash).
- 2) Uncoil cord, separating the two wires at end.
- 3) **RISING** rH Alarm: With a small flathead screwdriver onhand, secure one wire into slot labeled "L". Secure the other wire into slot labeled "2".
FALLING rH Alarm: With a small flathead screwdriver onhand, secure one wire into slot labeled "L". Secure the other wire into slot labeled "3".

*Note: It does not matter which wire is in which slot.

- 4) Place signal light where it is sure to be seen.
- 4) Make sure to Test (see below). Unit is now set for Humidity Alert Service!

Testing the Humidity Alert Signal Check operating condition periodically (suggested bi-annually). Always assure yourself that the system is functioning properly before you rely on it. After installing the two D-Cell batteries, with the wires secured for either rising or falling alert, rotate the adjustable dial to force the alert. **The light will start to flash immediately.** When the Door Ajar Alert sensors contact each other, the light will stop flashing.

Limited Warranty:

Warrantor: Dealer, Distributor, Retailer, and Manufacturer
Warranties and Remedy We believe that this is a high quality product. Although we test all products for proper functionality, we cannot guaranty that there will never be a defective unit. For this reason, it must be clear that the Warrantors are not insuring your product/premises or guaranteeing that there will not be damage to your person or property if you use this Product. If this warranty is unacceptable please return the unused product for a full refund.

One Year Limited Warranty - TIPTEMP warrants this product to be free from defects in material and workmanship under normal use for one year, and is not responsible for consequential damage or installation costs of any nature. In event that the Product does not conform to this Warranty at any time during the period of one year from original purchase date, Warrantor will repair the defect and return it to you at no charge. Important: The Warranty is limited to replacement of the Product ONLY.

This warranty shall terminate and be of no further effect at the time the Product is 1) damaged by extraneous causes such as fire, water, etc. or not maintained as reasonable and necessary; 2) modified; 3) improperly installed; 4) repaired by someone other than the Warrantor; 5) used in a manner or purpose for which the Product was not intended.

WARRANTORS' OBLIGATION UNDER THIS WARRANTY IS LIMITED TO REPAIR OR REPLACEMENT OF THE PRODUCT ONLY. THIS WARRANTY DOES NOT COVER PAYMENT OR PROVIDE FOR THE REIMBURSEMENT OF PAYMENT FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

It must be clear that the Warrantors are not insuring your products/premises or guaranteeing that there will not be damage to your person or property if you use this Product. The Warrantors shall not be liable under any circumstances for damage to your person or property or some other person or that person's property by reason of the sale or use of this Product, or its failure to operate in the manner in which it is designed. The Warrantor's liability, if any, shall be limited to the original cost of the Product only. Use of this Product is at your own risk. Procedures for obtaining performance for Warranty: In the event that the Product does not conform to this Warranty, the Product should be shipped or delivered freight prepaid to a Warrantor with evidence of original purchase. If in any way you are not comfortable with the product or its Limited Warranty, we encourage you to return it unused for a full refund.

DO NOT DISASSEMBLE THIS PRODUCT. It does not contain any user serviceable components.